DESCRIPTION

New construction housing for Mini Accurus small aperture round trims (ACM5001, ACM5002, ACM5003, ACM5004).

For new construction applications. Insulation must be kept 3" from all sides and at least 1" above the housing.

Catalog #		**Type**
Project		
Comments		**Date**
Prepared by		

SPECIFICATION FEATURES

A ...Housing
Housing and plaster frame: 18 gauge CRS with flat black powder coated internal finish. Adjustable plaster frame can accommodate up to 1" ceiling thickness.

B ...System Protection:
Thermal protection provided to guard against overheating and misuse of insulation over and around fixture. Vent holes in housing provide cooler operation.

C ...Electrical
Integral j-box and low voltage (12V) transformer . 120V input, 12V output. Junction box is U.L. listed for through branch wiring. Includes five 1/2 trade size knockouts (six knockouts when magnetic xfmr. is specified)

D ...Lamp
12V MR16 50 watts max. (not included) Internal rotation ring with locking adjustment. Provides 360° rotation of trim and secures original trim position after relamping. "POSI-GRIP" bi-pin lamp socket for firm, mechanical lamp connection.

E ...Mounting
Hanger Bars and Butterfly Brackets included for residential and commercial applications respectively.

Ceiling Cut-Out: 3.63" dia.

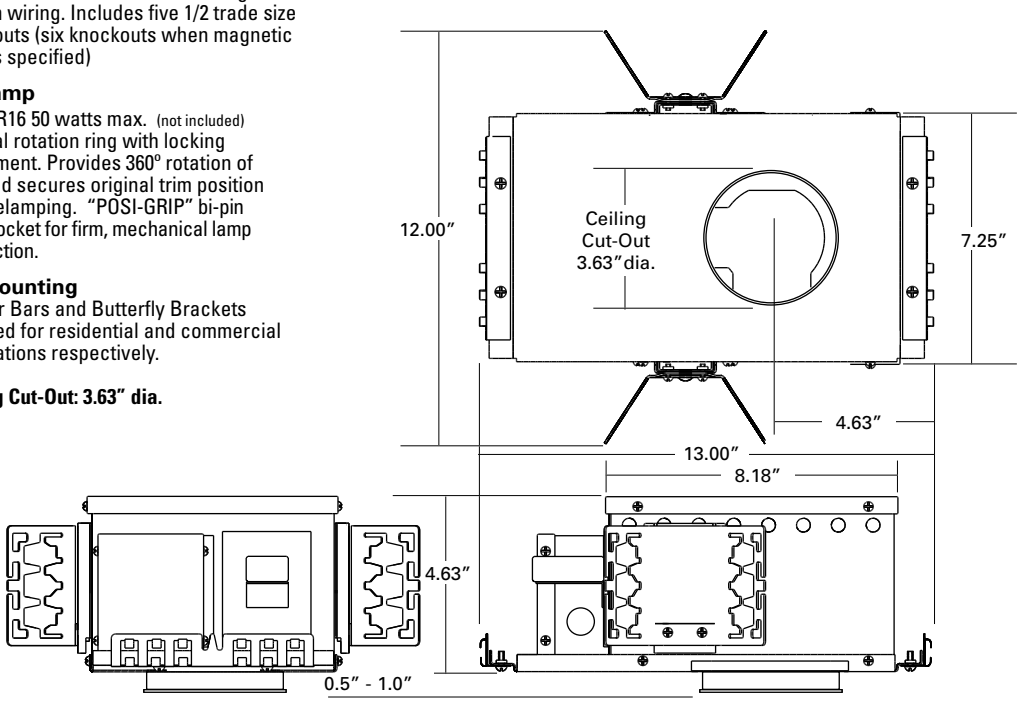



MINI ACCURUS

ACM500
New Construction Housing for Round Trim

FOR 12V MR16 50 watts max.

c UL us

ORDERING INFORMATION

ACM500		
Housing **ACM500** = Mini Accurus New Construction Housing for Round Trim w/ Integral Transformer	**Transformer** **ELC** = Electronic **MAG** = Magnetic	**Voltage** **120** = 120 volts primary **277** = 277 volts primary